
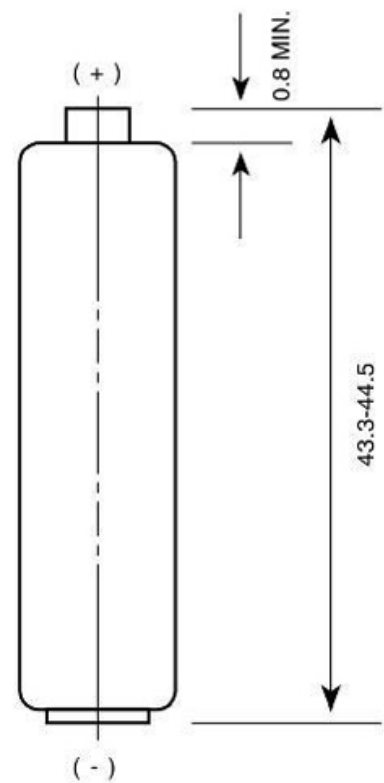


Model No.: **GP24PL**

NO MERCURY & CADMIUM ADDED	
Description	: Extra Heavy Duty Battery, AAA Size
Chemical System	: Zinc-Manganese dioxide (Zinc Chloride)
Nominal Voltage	: 1.5 Volts
Max. Dimensions	: ϕ 10.5mm×44.5mm
Terminals	: Protruded positive(+) and flat negative(-) contacts
Jacket	: Printed Tube
Applications	: All electronic devices, e.g. toys, data banks auto appliances, calculators, remote controls, portable lightings.
Effective Period	: 36months (Storing at -10°C to 25°C and 60±20% RH)
Weight(Reference)	: 8.4g

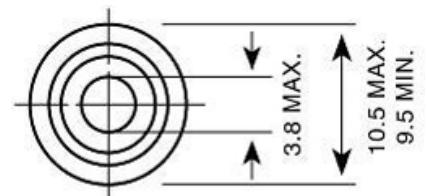

Unit: mm


Cross References:

GP	JIS	IEC	ANSI
24PL	R03	R03	24D

Typical Service Life:

Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
10 Ohms	1 Hr/Day	0.9V	2.7Hrs

10 Ω 1hr/day e. v= 0.9V

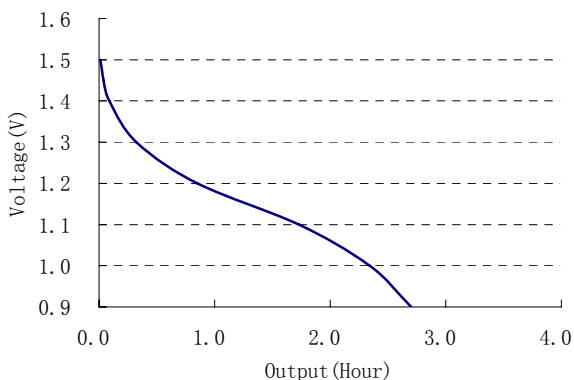

At 20±2°C within 60 days of manufacture

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors